

# VRJ

HEALTHCARE  
PRIVATE LIMITED



**Regd. Office:-** S-279-B, First Floor, School Block,  
Shakarpur, Delhi-110092 INDIA

**Corporate Office:-** Suite No. 017-0094  
Near Railway Line, Agarwa  
Hospital Road, Motihari- 845401 (BIHAR)



[md@vrjhealthcare.com](mailto:md@vrjhealthcare.com)

# INDEX

|   |       |
|---|-------|
| <b>01.</b> Fingertip pulse oximeter.....  | 01    |
| <b>02.</b> Handheld pulse oximeter with NIBP.....                                     | 02    |
| <b>03.</b> Infrared forehead Thermometer, Digital Thermometer.....                    | 03    |
| <b>04.</b> Fetal Doppler & Fetal Monitor.....   | 04    |
| <b>05.</b> Fetal Monitor Ambulatory Blood Pressure Monitor .....                      | 05    |
| <b>06.</b> Electrocardiography System (ECG 100G, 300G, 600G, 1200G).....              | 06-09 |
| <b>07.</b> Emergency Ventilator.....  | 10    |
| <b>08.</b> Autoloader Collapsible Stretcher, Scoop Stretcher and Stair Stretcher..... | 11    |
| <b>09.</b> Full Face Mask & Nasal Mast and Nasal Pillow for CPAP & BIPAP Mask.....    | 12    |
| <b>10.</b> N95 Mask and Hot Water Bottle.....   | 13    |
| <b>11.</b> Anaesthesia Machine.....   | 14-15 |
| <b>12.</b> Breast Pump Electrical & Manual.....                                       | 16    |
| <b>15.</b> Patient Monitor & Miscellaneous Equipments ICU & NON ICU.....              | 17-33 |
| (a) Patient Monitor   |       |
| (b) Biphasic Defibrillator  |       |
| (c) Nebulizer   |       |
| (d) Suction   |       |
| (e) Air Bed   |       |
| (f) Mix   |       |
| (g) Oxygen Concentrator   |       |
| (h) Syringe Pump & Infusion Pump  |       |
| (i) Photo Therapy   |       |
| (j) ETCO2 & IBP Module  |       |
| (k) Air Splint  |       |
| (l) Ventilator  |       |
| (m) Spirometer  |       |
| (n) Video Laryngoscope  |       |
| (o) Monitor & All Accessories   |       |
| <b>16.</b> Surgical Equipments ICU Bed & NON ICU Bed Home Care Products.....          | 34-59 |

# Fingertip Pulse Oximeter

FPO-50

## Specifications

- Four Display modes
- Adjustable Screen Brightness
- Low Power Consumption; shut off automatically when no signal
- Power Supply: 1.5V(AAA Size) alkaline batteries can work 20 hours continuously.
- Can measure SpO2, Pulse rate and Perfusion Index Accurately
- With Beep & Alarm Features



Auto-Rotation  
Display

CE

# Fingertip Pulse Oximeter (Child)

FPO-92

## Specifications

- Specially designed for the Children.
- Display Type: OLED display
- Power Consumption: Below 30mA
- Automatic Power off when there is no Finger inside the Fingertip.

Upto  
12 YEARS  
AGE



With Beep & Alarm

CE

01



[md@vrjhealthcare.com](mailto:md@vrjhealthcare.com)

# Handheld Pulse Oximeter

CMS-60 C

## Specifications

- Displays SpO2 and Pulse waveforms
- Plethysmograph graph displayed for improved Performance
- Color TFT Display with Multi-Directional Views
- Brightness Control
- Low Power Consumption with Low Battery Alarm on Display
- AC charger or from USB Port
- Programmable Display
- Pulse Sound Indication
- FDA and CE Approved
- Great Product for Hospitals, Health care Providers, Physicians, Nurse Practitioners.



Rechargeable Battery

CE

# Pulse Oximeter with NIBP

CMS-5100

## Specifications

- 2.8" Height brightness TFT LCD display
- High brightness LED display of NIBP, SpO2 and Pulse rate
- Visual and Audio alarms, Adjustable
- Memory : Built-in flash memory
- Audio volume adjustable
- Build-in rechargeable Li-Polimer

## NIBP

- Mode: Manual/Auto/Continuous
- Dimensions (LxWxH): 190x160x244 (mm)
- Net Weight: 1.5Kg



CE

02



[md@vrjhealthcare.com](mailto:md@vrjhealthcare.com)

## IT - 01

## Infrared Forehead Thermometer

### Specifications

- Measurement Methods: Non-contact
- Measuring Distance: 3~5 cm
- Measurement Range:  
Body temperature: 32.0~43.0°C  
Object temperature: 5.0~95.0°C
- Accuracy:  
Body temperature:  $\pm 0.2^{\circ}\text{C}$   
Object temperature:  $\pm 1.0^{\circ}\text{C}$
- Resolution: 0.1°C (0.1° F)
- Working Environment: (15.0~40.0)°C RH :  $\leq 85\%$
- Storage Environment: (-20.0~55.0)°C RH:  $\leq 93\%$
- Power Supply: DC 1.5Vx2 (2AAA 7#)
- Memory: Previous temperature record



CE

## DT - 01

## Digital Thermometer



### Technical Specifications

|                       |                     |
|-----------------------|---------------------|
| Auto Shut Off         | Yes                 |
| Low Battery Indicator | Yes                 |
| Fever Alarm           | Yes                 |
| Replaceable Battery   | Yes                 |
| Response Time         | 60 seconds          |
| Memory                | 1                   |
| Accuracy              | $\pm 0.1 (\pm 0.2)$ |
| Test Range            |                     |

CE

## DT - 02

## Flexible Digital Thermometer

### Technical Specifications

Digital Medical , Easy Accurate and Fast 10 Second Read & Monitor Fever Temperature , Flexible Tip , Waterproof for Baby ,Kids, Adults, Pets ,Oral, Underarm,Rectal



CE



## ND 105

## Fetal Doppler



### Specifications

#### Main Technology Specifications

Working Frequency : 2.0 MHz  $\pm$  10%  
Ultrasonic output Power :  $lob < 10 \text{ mW/cm}^2$   
Overall Sensitivity :  $> 90 \text{ dB}$  (integrated sensitivity 200mm away from the surface of the probe)  
While measuring integrated sensitivity using the doppler frequency (300 + 50) Hz  
Reflecting target speed :  $10 \text{ cm/s} \sim 40 \text{ cm/s}$   
FHR measuring range : No narrower than 50bpm-240bpm (+ bpm). (Beat Per Minute)  
FHR accuracy:  $\pm 2 \text{ bpm}$   
Spatial-peak temp-peakacoustic pressure:  $< 0.1 \text{ MPa}$ .  
Negative Peak Sound Pressure: (p<sub>-</sub>)  $< 1 \text{ Mpa}$   
Output Beam Intensity: (I<sup>0</sup>)  $< 20 \text{ mW/cm}^2$   
Spatial-peak Temporal-average Derived Intensity: (I<sub>pta</sub>)  $< 100 \text{ mW/cm}^2$   
Continous Working Time:  $> 5 \text{ h}$  (Low battery capacity or large volume may reduce working hours)  
Coupling gel acoustic impedance  $1.5 \sim 1.6 (10^6 \text{ g/cm}^3 \cdot \text{s})$   
Auto output power  $< 1.0 \text{ W}$   
Battery Type Recommended Two pieces of 1.5 V DC battery ( SIZE AA LR6 )  
Working Environment Temperature  $+5 \text{ C} \sim +40 \text{ C}$  Humidity  $< 80\%$  atmospheric pressure  $86 \text{ kPa} \sim 106 \text{ kPa}$   
Transport and Storage Environment Temperature :  $-10 \text{ C} \sim +40 \text{ C}$  Humidity  $< 80\%$   
Atmospheric Pressure :  $86 \text{ kpa} \sim 106 \text{ kPa}$ , well-ventilated room without corrosive gases.

CE

## BT 350

## Fetal Monitor



### Features

- 7" wide TFT color LCD Display.
- Upto 150 patients data saving.
- Fetal heart sound play and record in PC.
- Rotating Screen.
- Multiple language support.
- Built-in quick guide (LCD Type).
- Waterproof probe.



CE

## CMS 800G1

## Fetal Monitor

### Features

- Light dexterous appearance, tops horizontally and walls can be hoisted
- 8.0" screen color LCD display, rotatable screen to 60
- Display of the patient data and curve clearly
- FHR 120 BPM - 160 BPM normal range label  
Manual records fetal movement
- Sound and color alarm for high and low fetal heart rate.
- Continuous 24-hours real time monitoring function
- Continuous 12-hour patient curve and data storage, playback and print With picture freeze function.
- Optional English Interface



CE

04



md@vrjhealthcare.com

## CMS 800G2

## Fetal Monitor



### Features

- 7" screen color TFT display, with touch function.
- Display of the patient data and graph clearly
- FHR 120 BPM~160 BPM normal range label
- Record fetal movement manually
- Audible and visible alarm for high and low fetal heart rate
- Continuous 24-hour real-time monitoring function
- Continuous 12-hour patient graph and data storage, review and print
- With picture lock function
- Optional Chinese and English interface
- Single, Twins Monitoring optional
- 9 crystal board band pulsed wave transducer
- Extra-long life, high-resolution built-in thermal printer



## ABPM 50

## Ambulatory Blood Pressure Monitor



### Features

- Compact and portable, user-friendly interface, easy to use
- Patient range: adult, pediatric, neonate
- 24 hours ambulatory NIBP monitoring function, up to 350 groups of ambulatory NIBP data can be recorded for once.
- Perfect combination of automatic and manual measurement method, up to 300 groups of data can be recorded for once by manual measure.
- High-definition color TFT display, strong visibility
- By data review interface such as "data list", "trend graph", "big font", NIBP data is clear at a glance
- Display of low power prompt, alarm, error message and time
- Supply two kinds of unit: mmHg/kPa
- Display interface can be switched between Chinese and English
- Parameter alarm dispose function is optional
- Communicate with PC, PC software can achieve data review, measured results analysis, view of trend graph, reports printing and other functions



## PM 10

## Portable E.C.G Monitor



### Features

- 1.77" Colour TFT-LCD.
- Quickly To Check Ecg Once Finger Touching, Convenient To Operate.
- Accurate Conclusion Can Be Obtained Immediately After Measuring.
- The Built-in Rechargeable Lithium Battery Can Continuously Record for Up To 500 Cases In Full Charging.
- Bluetooth Transmission
- Historical Data Can Be Printed At Any Time, Convenient To Diagnose.

### How To Take ECG ?



Type I



Type II



Type III



Type IV



**TLC 5000**

# Holter ECG System

**TLC 9803**




**Twelve Channel**



**Three Channel**

### Software Screenshots



### Accessories



**Twelve Channels**



CE


**Three Channels**



CE








## Features

- Sync collection for 12-lead ECG, adopt digital signal processing technology and get high-quality ECG waveform via power frequency filter, baseline filter and EMG filter of ECG signal.
- Display of 3/6/12-lead ECG, print mode, sensitivity, paper speed and filter state, etc. on one screen, convenient for contrastively diagnosing.
- Multiply printing modes and formats, including auto 12x1, auto 6x2+1, auto 6x2+1\_H, auto 6x2, auto 6x2\_H, auto 3x4+1, auto 3x4+2, rhythm 12, rhythm 10, rhythm 8, rhythm 6, manual, etc. Trend chart and histogram of P-R interval can be printed, waveform length printed can be adjusted, and with time print function, which meets different requirements.
- Paper speed: 5mm/s, 6.25mm/s, 10mm/s, 12.5mm/s, 25mm/s, 50mm/s.
- With the functions of auto-analysis and auto-diagnosis for routine ECG parameters, provide measurement results and auto-diagnosis conclusion for HR, P-R interval, P Duration, QRS Duration, T Duration, Q-T interval, Q-Tc, P Axis, QRS Axis, T Axis, R(V5), S(V1), R(V5)+S(V1), etc. which reduces the doctor's burden.
- Built-in memory stores up to 1000 cases, convenient for case review and statistic.
- Multi-language(Turkish, French, Chinese, English, German, Kazakstan, Polish, Portuguese, Russian, Slovenian, Spanish and Ukrainian) interface and report.
- In optimal DC state, up to 10-hour standby time, continuous print more than 3-hour, record up to 300 ECG waveform(commonly, it is 3s case), which meets the requirements of visiting a patient at home and body examination.



# ECG 600G

# ECG Six Channel Machine




## Features

- 7" TFT, touch screen, led backlight
- Digital isolation technology and signal processing solution, digital filter
- Patient management, name, age and id.
- Detail analysis report.
- Built-in lithium rechargeable battery, wide thermal printing system
- USB and LAN socket.
- Memory: Built-in memory or mini SD Memory card. Stores more than 1000 pieces of archive
- Auto-measurement, auto-analysis, and auto-interpretation.

## Technical Parameters

|                                 |   |
|---------------------------------|---|
| • Lead                          | Standard 12 leads   |
| • Patient leak current          | <10uA   |
| • Input impedance               | >=50M   |
| • Frequency response            | 0.05 ~ 150HZ(-3dB)  |
| • Time constant                 | >3.2S   |
| • CMRR                          | >100dB  |
| • Dimension of recording paper  | 80mmx20m  |
| • Paper speed                   | 25mm/s, 50mm/s  |
| • Sensitivity choice            | 5, 10,20mm/mV.  |
| • Measurement parameters        | HR, P-R interval, P-QRS Duration,Q-T interval, Q-Tc,P Axis, QRS Axis, T Axis, R(V5), S(V1), R(V5)+S(V1) |
| • Product safety type           | Class I, CF, Defibrillation pacing protection   |
| • Enduring polarization voltage | ± 300mv   |
| • Noise level                   | <15uVp-p  |
| • Dimension                     | 130mm(L)× 74mm(W)× 25mm(H)  |
| • Net weight                    | 2.3KG   |

CE

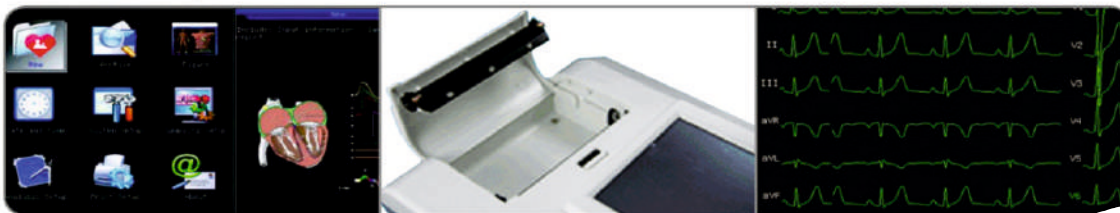


## ECG 100G

## ECG Single Channel Machine

### Features

- 2.7" STN display shows the working status and ECG waveform. Check the waveform before printing to save record paper.
- Output system: High-resolution thermal-array(8dots/mm), it needs not be adjusted. Recording
- frequency Response: Up to 150Hz.
- The device can record exact single ECG waveform and remark. The mark includes: lead sign, sensitivity, paper speed, filter state.



CE FDA

## ECG 300GA

## ECG Three Channel Machine




### Features

#### Operation

- 2.7" LCD Colored Display, accurate and clear ECG waveform and working state display, economical to save recording paper.

#### Functions

- Sync collection for 12-lead ECG, adopt digital signal processing technology to get high-quality ECG waveforms via AC filter, baseline filter and EMG filter of ECG signal.
- Display of 1/2/3-lead ECG, print mode, sensitivity, paper speed and filter state, etc. on one screen, convenient for contrastively diagnosing.




CE

## ECG 300G

## ECG Three Channel Machine

### Features

- 3.5" TFT Color LCD display shows the working status and ECG waveform. Check the waveform before printing to save record paper.
- 12 leads ECG simultaneous acquisition, digital signal processor, to get higher quality ECG waveforms through the AC filter, baseline filter and EMG filter of the ECG signals.
- Simultaneous display of 3/6/12 leads ECG waveform, and the state of printing mode, sensitivity, speed, filter etc., to be easy for interpretation.



CE FDA





**Features**

Easy to take:  
The main parts adopt good-quality components, protection function.

**Description**

JX10 is used for First-Aid, Ambulance, Emergency situation and patients transport in hospital  
it can be used for child and adult patients,

**ISO 9001 CERTIFICATION  
ISO 13485 CERTIFICATION**

**Environmental Requirements**

Relative humidity: 15%-95%  
Power: AC100V-240V  
Gas source: 0.4Mpa, 60l/min  
Ambient temperature: -18~50C  
Atmospheric pressure: 70~106kPa  
Li-battery: 12V, rechargeable

**Configuration**

Class? ,Type B-by protection against electric shock.  
IPX4-by protection against harmful ingress of water, particulate matter.

**Classification**

Standard Configuration: ventilator  
Oxygen pressure Reducer, High-Pressure oxygen hose, lung Simulator, breath Circuit, Mask  
Power Adapter



|                      |   |
|----------------------|---|
| Modes                | JX 10<br>CMV  |
| Tidal Volume         | 50~1000mL   |
| I:E                  | 2:1 1:1 1:1.5 1:2 1:2.5 1:3                                 |
| Over Pressure Relief | <72hPa  |
| Monitor              | Airway Pressure   |
| Alarm                | Low Battery   |
| Indicators           | Inspiration, Exhalation, Low Battery Voltage, Charge, power |
| Package Dimension    | 450x 380x180mm  |
| Weight               | 6.5kg (Including all the accessories)                       |

**Portable Ventilator can be used for transportation ICU and ambulance**



## NM - AL

## Autoloader Collapsible Stretcher




| Model   | High Position (L*W*H) | Low Position (L*W*H) | Maximum Angle of the Back | Packing Size (1 pcs) | Load Bearing | N.W  | G.W  |
|---------|-----------------------|----------------------|---------------------------|----------------------|--------------|------|------|
| NM - AL | 190x55x92cm           | 190x55x25cm          | 75°                       | 195x62x25.5cm        | <159kg       | 40kg | 46kg |

CE FDA

## NM - SS

## Scoop Stretcher

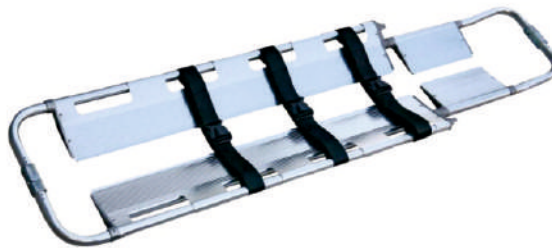

| Model   | Product Size (L*W*H) | Folder Size (L*W*H) | Packing Size (1 pcs) | Load Bearing | N.W   | G.W    |
|---------|----------------------|---------------------|----------------------|--------------|-------|--------|
| NM - SS | 210x44x6cm           | 120x44x9cm          | 170x45x7cm           | < 159kg      | 8.5kg | 10.2kg |

CE FDA

## ST - 01

## Stair Stretcher



| Model   | Product Size (L*W*H) | Folder Size (L*W*H) | Packing Size (1 pcs) | Load Bearing | N.W | G.W   |
|---------|----------------------|---------------------|----------------------|--------------|-----|-------|
| ST - 01 | 90x51x91cm           | 90x17x59cm          | 96x16x54cm           | < 159kg      | 8kg | 9.2kg |

CE



# Full Face Mask & Nasal Mask

## Full Face Mask




CE

## Nasal Mask

**Forehead frame support**  
Improves comfort and seal.

**Dual-wall cushion**  
soft silicon material  
with ergonomic pad  
shape provides more  
comfort and better seal.

**Quickfit clips**  
easy to fit even in  
the dark.



**Diffusing vent**  
disperses air gently  
and quietly away  
from bed partner.

**360° elbow rotation**  
positions the tubing  
for maximum comfort.

CE

**Simple**

Detachable silicone mask seal with anatomically mold feature

**Light**

Extreme lightweight provides pleasant and comfortable feel

**Quiet**

Quiet exhalation system



Fine exhalation holes



Oxygen enrichment port



Supporter



# Nasal Pillow CPAP Mask



Adjustable angle of pillows  
for best fit.



360° rotating elbow with gentle  
and quiet exhaust.



Dual direction adjustable  
headgear.



Packed with  
S/M/L pillows.

*One mask fits most people with  
three pillow size included.*



CE

*Super lightweight design  
provides minimal face contact  
for maximum comfort.*

*Excellent value for money.*



## NM - 01

## N95 Mask



### Features

A disposable N95 mask (respirator) is a safety device that covers the nose and mouth and helps protect the wearer from breathing in some hazardous substances. An N95 mask protect you from breathing in small particles in the air such as dust and mold. It is design to filter out at least 95% of the dust and mold in the air.

- \* Type: mask and respirator
- \* Half Mask
- \* Suitable for Pharmaceutical
- \* Air-purifiring respirator
- \* Ear, head mount

CE

## HWB

## Hot Water Bottle

2 Litre

2.5 Litre



### Features

The Hot Water Bag is used as a natural body warmer and also for heat therapy treatment. This is very helpful product for pain relief and can be used for joint pains, muscular cramps, menstrual pains, muscle pull, stomach and back aches, arthritic and rheumatic pains, sports aches and pains.



Colours Available



CE



# M-TEK 18 ANAESTHESIA MACHINE

## M-TEK 18 Anaesthesia Machine

### SPECIFICATION

1. Two Gases Rotameter Oxygen & Nitrous-Oxide
2. Oxygen Flowmeter range 100cc/min. to 10 litres/min., Nitrous Oxide Flowmeter range 200cc/min. to 12 litres/min.
3. Standard Fresh Gas Outlet.
4. Change Over System Open Circuit to Close Circuit.
5. Emergency Flush Valve at front Panel connected, to incoming O supply.
6. Goldman type Halothane Vaporizers.
7. Parking space for two Additional Vaporizers.
8. Non-return cum Pressure Relief Valve Minimize risk of back flow of gases.
9. Blows off valve when pressure exceeds 200cm of water column fitted.
10. Provision to fit Ventilator.
11. Provision to fit Carbon at rear for two 'B' type cylinder.
12. Table top made of Stainless Steel.
13. Top tray at eye level to keep monitoring instrument.
14. Maggill's circuit or Bains circuit.
15. One spacious Drawer on smooth runner.
16. Four Castor Trolley with front two lockable Wheels.
17. Pin Index Yokes two for Oxygen and two for Nitrous Oxide.
18. High-efficiency Regulators for reliability Two Each for p & TJO.

### SAFETY FEATURES

- N<sub>2</sub>O cut off in case failure of Oxygen supply.
- Low Pressure Oxygen Audible Alarm.





# Anaesthesia Machine

ACES

## Features

- 7" color LCD screen, different parameters distinguished by colors for easy recognition
- Novel designed ventilator pneumatic system decreases the consumption of Oxygen
- Built-in "No Water Vapor Coagulation" sampling device ensures ZERO maintenance
- Fast-release function by APL valve is comparable to high end models
- Advanced one button switch of manual/ auto provides convenient pneumatic/auto controlling interchanges
- Optional AGSS device for more protection

## Physical & Environmental Specification

- Dimensions (H×L×W): 1386×839×628mm
- Weight: 85kg (basic unit)
- Storage Temperature: -20~+55°C
- Working Temperature: +10~+40°C
- Storage Humidity: < 93%

## Electrical Specifications

- Mains: 100~240V AC, 50/60Hz
- Battery: 24V DC, minimum 120min

## Pneumatic Specifications

- Gas Supply: O<sub>2</sub>, N<sub>2</sub>O: 0.28~0.6MPa
- Flowmeter: O<sub>2</sub>: 0~1L/min; 1~10L/min  
N<sub>2</sub>O: 0~1L/min; 1~10L/min
- Gas System: Oxygen supply failure alarm  
Oxygen supply  
O<sub>2</sub> flush: 25~75L/min
- Working Mode: Closed, Semi-closed, Semi-open
- Driven Mode: Pneumatically driven and electronically controlled
- Safety Valve: < 8kPa
- Operation mode: Man. / Vent.

## Ventilator Specifications

- Patient Type: Adult, pediatric
- Ventilation Modes: IPPV, Manual;  
optional: SIPPV, SIMV, SPONT
- Setting: Touch key
- Tidal Volume: 0~1600ml
- Ventilation Frequency: 4~100bpm
- I:E Ratio: 4:1~1:8
- PEEP: 0~20 cmH<sub>2</sub>O
- Inspiratory Plateau: Off, 5%~60%Ti
- Monitoring Display: Display: 7" color wide LCD screen  
Pressure: Ppeak, Pplat, Pmean, PEEP  
Volumes: MV, Vt  
Breath rate  
Gas: FiO<sub>2</sub>  
Graph display: P-t, F-t waveforms
- Alarm: High Airway Pressure/Low Airway Pressure  
High Minute Volume/Low Minute Volume  
High FiO<sub>2</sub>/Low FiO<sub>2</sub>  
Alarm Silence: <120 seconds



## Vaporizer

- Support 2 vaporizer (Selectatec® with interlock, optional standby vaporizer parking holder)
- Agent Type: Halothane, Enflurane, Isoflurane, Sevoflurane available

CE

15

EBP - 01

Electric Breast Pump



Features

This Breast pump is the ideal appliance. The design of the electric breast pump, is suitable for Moms who are inconvenient to feed their babies directly. This unit adapt four suction mouth dispersion device, let suction distributed uniformly around the nipples collapses, makes Moms more beautiful and healthier.

Specifications

- Power Input: DC 5.0 V
- Rated Power: 3.6 W
- Lactagogue Intensity: 0.012MPa (Max. Vacuum), 9 adjustable levels
- Suction Intensity: 0.034MPa (Max. Vacuum), 9 adjustable level
- Lactagogue: 100T/Min.
- Suction Rate: 26-60 T/Min.



MBP - 01

Manual Breast Pump

MBP - 02



Features

- Innovative design break through the traditional way of sucking.
- Square with Ergonomic, like a baby's gentle sucking.
- That is free of bisphenol A, safe and healthy.
- Operatable with just one hand.
- Soft silicone membrane offers comfort while expressing milk.



Features

- More comfortable pumping position due to unique design
- Soft massage cushion with warm feel
- Compact lightweight design, Easy cleaning
- Intuitive assembly, easy visual matching of parts

Specifications

| Component   | Ingredient | Temperature Tolerance | Disinfection        |
|---|------------|-----------------------|---------------------|
| Dust cover, Suck milk cup, Handle, Nursing bottle, Nipple covers, The back of nursing bottle transition joint | PP         | 110°C                 | Boiling Vapour      |
| Lower nozzle funnel   | Silicone   | 120°C                 | Disinfectant liquid |
| Silicone massage pad/ The bottle nipple sealing silicone pad  | Silicone   | 120°C                 |                     |



# PATIENT MONITOR

ISO9001:13485 enterprise



## Feature:

1. 12.1 inch, 800×600 dpi, color TFT display;
2. Separated Alarm and beep sound setting;
3. Separated module: Main board+Parameter module (ECG, NIBP, SpO2);
4. Display brightness adjustable;
5. Real time S-T segment analysis, and ARR analysis;
6. SpO2 Pitch Tone Variation and Drug Dose Calculation;
7. Parameter waveform and characters color selectable
8. Multi-display: Standard, Large font, Trend Coaxis, OxyCRG dynamic
9. Standby mode for power saving and suspend monitoring;
10. 7-lead ECG waveforms display in phase;
11. Capture dynamic waveforms and history waveforms review;
12. VGA output;
13. Built-in rechargeable lithium battery 4 hours, and battery volume checking.
14. Efficient resistance to interference of defibrillator and HF knife;
15. SD card memory and USB data output;
16. TCP/IP networking platform enable abundant future upgrade & CMS
17. Complete and flexible mounting solution for transportation and in-patient monitoring

## Standard parameters:

5-lead ECG, SpO2, NIBP, RESP, TEMP, HR;


**Optional:** Touch Screen, Printer, 3/12-lead ECG, SD card, VGA output, 2/4-IBP, EtCO2, AG module, Masimo/Nellcor SpO2, Wall mount, Trolley.



**CONTEC™**

「CARE HEALTH CARE LIFE」

LIGHT THE RHYTHM OF LIFE  
WITH TECHNOLOGY

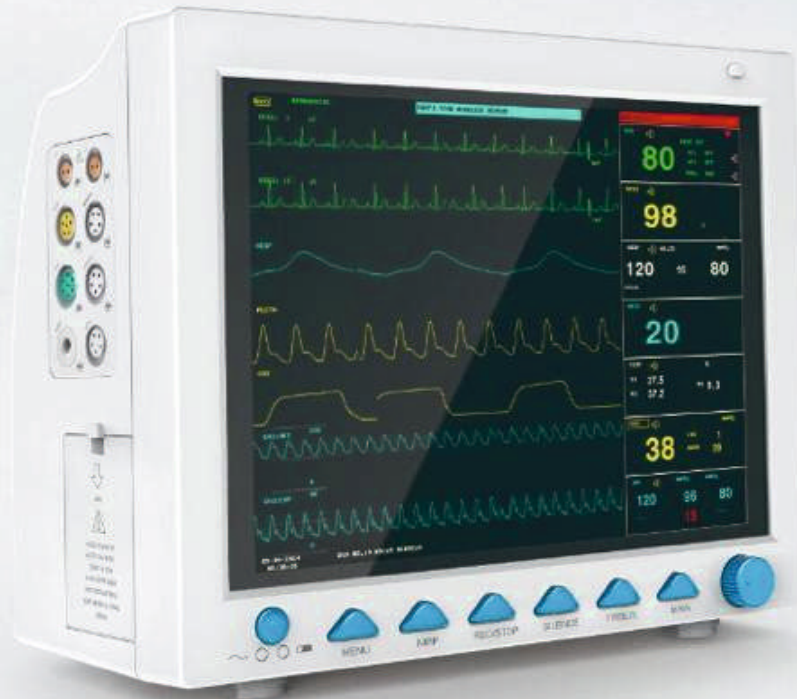

# Biphasic Defibrillator

## Optional Features

Printer

AED Mode

SpO<sub>2</sub> + Pulse Rate

NIBP

Etc<sub>2</sub>



### General

- Display : 7" Colour TFT
- Display area : 150 mm x 90mm
- Dimensions : H280 x W 330 x D220 mm (Max) without Paddle
- Weight : Approx. 6 Kgs.
- Unit ON-OFF : By front panel keyboard, Encoder
- Operation : User adjustable high & low limit, Audible and visual alarming
- Alarm : 24 hrs Graphical and Tabular trend of ECG, SpO<sub>2</sub>, NIBP EtCO<sub>2</sub>
- Charge/ Discharge Control : Charge and Shock button on front panel and paddles.

### Defib (External Paddles)

- Operating Mode : Manual
- Waveform : Biphasic Truncated Exponential
- Energy : 2 to 200 joules in 12 steps selection
- Energy display : Display selected and charged/delivered energy
- Synchronous Cardio Version : Energy delivery begins with in 60 ms of the QRS Peak
- Charging Time : 6 seconds on Mains
- Paddle Assembly : External paddle assembly with coil retractable high voltage cable, Adults & Pediatric paddle integrated to same handle
- Check Mode : Manual check mode
- Patient Impedance range : 35 ohm to 250 ohm
- Sock Delivery : Through paddles or pads

### Defib (Internal Paddles) (Optional)

- Operating Mode : Manual
- Waveform : Biphasic Truncated Exponential
- Energy : 2 to 50 joules in 8 steps selection
- Synchronous Cardio Version : Energy delivery begin with in 60 ms of the QRS Peak
- Charging time : 6 seconds on Mains
- Paddle Assembly : Internal Paddle assembly with paddle extension cord

### ECG

- Frequency response : 0.5 Hz to 35Hz
- Patient isolation : Optical isolation
- Lead selection : Lead I, II and III
- Gain setting : 0.5, 1.0 and 2.0
- CMRR : > 90 db
- Sweep Speed : 12.5, 25.0, 50.0 mm/sec
- Digital filter : Digital signal processing for good quality of ECG
- ECG traces viewing : 4 seconds ECG traces can be viewed

### Environmental

- Operating Temp : - 5 C to +50 C
- Humidity : Up to 95 % non-condensing

### Power Supply

- Input : 150 - 276 VAC, 50 Hz, 1 O
- Battery : 12 V 4.5Ah, Rechargeable, (Sealed Lead Acid)
- Back-up time : 3 hours min, on full charge in ECG mode 70 - 100 choc of 150 joules delive (Full charge)
- Power consumption : 30 Watts (max.) in ECG mode

### AED Mode

- Wave form : Biphasic truncated exponential
- Energy level 200J
- AED Shock Series : Automatic after identifying shockable rhythm
- Charge Command : Front panel button, shock
- Shock Command : Analyze
- Controls : Self adhesive, adult pads
- Defibrillation Electrode : Extensive text and audible messages to guide user
- Voice and Text prompts

### Printer

- Paper Type : Thermal paper 50/55mm width, 20 meters length for 2" printer
- Event Printing : Prints 5 Seconds pre & post ECG with Date, Time, Energy and mode, Shock Status
- ECG in Defib Mode : Prints last 10sec ECG through paddle
- Prints Annotates in Defib Mode : Time, Date, Mode, lead name, Gain, Sweep speed
- ECG in Monitor Mode : Prints last 10sec ECG through cable
- Prints Annotates in Monitor Mode : Time, Date, selected Lead name, Gain, Sweep speed
- Manual Defib Check Mode : Prints the status of shock, Energy, Date and Time

### Heart Rate

- Range : 10 - 250 BPM
- Accuracy : +/- 2 BPM
- Resolution : 1 BPM
- Tone : Beep on every QRS detected
- Alarm Limit setting : 10 - 250 (step of 1)



**NB - 117**

**Nebulizer**



**Features**

- Small size, light weight and efficient therapy
- Ideal for all ages, personal home care
- System for aerosol therapy, piston compressor

CE

**NB - 119**

**Nebulizer**



**Features**

- Fast and efficient respiratory therapy
- Durable piston with thermal protection
- Noise free, Portable and handy
- Ensure smooth flow of aerosol mist
- Fast treatment, operate smoothly and quietly
- Reliable pressure and air flow

CE

**NB-121**

**Nebulizer**



**Features**

- Compact in design, Easy to use, Easy to carry.
- Smooth and quite operation, noise free.
- With nebulization accessory kit for adult and paediatric.
- Useful for all ages.

CE

**ASKIR C-30**

**Trolley Model Suction**



**Technical Parameters**

- Motor : Oilless and maintenance-free piston pump
- Power Feeding : 230V-50 Hz
- ISO 10079-1Classification : HIGH VACUUM / HIGH FLOW
- Max free air flow rate : 40 l/min
- Max Vacuum (adjustable) : -0.80 Bar -80 kPa -600 mmHg
- Noise Level : 61,5 dB
- Power consumption : 110 VA
- Fuse : 1 x F 4 A 250 V
- Duty cycle : Non-stop operation
- Weight : 6,5 Kg
- Size : 32x99x30 cm
- Years of Warranty : 2
- Place of Manufacturing : ITALY

**ASKIR c30**

Italian Medical Touch



**NEW HOSPIVAC 350**

**Trolley Model Suction**



**Technical Parameters**

- Motor : Oilless and maintenance-free piston pump
- Power Feeding : 230V-50 Hz
- ISO 10079-1Classification : HIGH VACUUM / HIGH FLOW
- Max free air flow rate : 60 l/min
- Max Vacuum (adjustable) : -0.90 Bar -90 kPa -675 mmHg
- Noise level : 51,7 dBA
- Power consumption : 230 VA
- Fuse : 1 x F 4 A 250 V
- Duty cycle : Non-stop operation
- Weight : 13 Kg
- Size : 46x85x42 cm
- Years of Warranty : 2
- Place of Manufacturing : ITALY

**NEW HOSPIVAC 350**

Italian Medical Touch



**SU 105**

**Trolley Model Suction**



**Technical Specifications**

|                         |                             |
|-------------------------|-----------------------------|
| Voltage                 | 220V±22V, 50Hz±1Hz          |
| Max negative pressure:  | ≥ 0.09MPa                   |
| Pumping Rate            | ≥ 20L/min                   |
| Continuous Working Time | 0-30 min                    |
| Bottle volume           | 2500 ml glass bottle, 2 PCS |
| Noise                   | ≤ 70dB (A)                  |
| G.W./N.W                | 13.8 KGS/11.5KGS            |
| Box Size                | 46.5*41.5*64.5cm            |




DVT - 09

DVT Prevention System



• Optional

Waist Cuff



Arm Cuff



Features

- Material: medical - TPU material
- Circumstantial - pressure deign, inner lining of sleeve is easy tp detach, clean and sterilize
- Unbreakable - super resist compressor
- Single cavity working mode is adjusted pressure, real-time monitor sleeve real pressure .zero skipping function, pressure of any chamber can be adjusted to "0" ,which allows skipping wounded or fragile body part
- Real - time monitoring pressure, automatic alarm if air escape
- Continuous pressure increasing efficiently vein evacuate to ensure velocity of flow of blood in higher level
- Special bicycle pump, low noise, low vibration and high charging speed
- Anti-electromagnetic interference

Specifications

|                     |                                     |
|---------------------|-------------------------------------|
| Treatment Time:     | 10 - 30 Mins, 30mins auto power off |
| Pressure Range:     | 20 - 250 mmHg, adjustment           |
| Compression therapy | A / B / C modes for compression     |
| Power Supply:       | AC 220V / 50Hz                      |

CE

AB - 101

Anti - Decubitus Pump System


With Ultrafine MATTRESS

Bed Sore Cure

System



Functioning

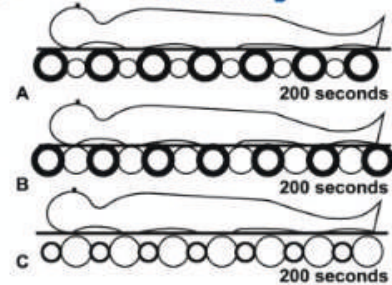

Specifications

A cell and B cell are inflated by pump alternately with one cycle of 10 minutes.

This innovative design is to refrain patient's muscle from long-term fixed pressure at same position to prevent bed sore. More comfortable to the patient.

CE



## Syringe Pump

SP-03

### Dimensions / Capacity

- Screen Size : 2.8 inches
- Dimension : 278mm x 145mm x 106mm
- Weight : 1.5 Kg
- Power supply : 100V-240V 50/60Hz
- Power Consumption : <55VA Disposable Syringes"
- Maximum Flow Rate : 1800 ( ml/h )  
1800 ( ml/h )
- Syringe Requirement : Refer to "Section 11 Notes on Disposable Syringes"



CE

## Infusion Pump

IP-01

### Specifications

- Infusion Rate : 0.1ml/h—1200ml/h (1ml/h step)
- Rate Accuracy : within ±5% (after correct calibration)
- Purge Rate : 100ml/h—1200ml/h (can be calibrated)
- Alarm : End of injection, Occlusion, Door Open, Bubbles in tube.
- Alarm : Wrong setting, Low Battery, AC Power Pulled Out etc.
- Power Source : 100V—240V 50/60Hz;4 hours internal battery backup.
- KVO speed : 1ml/h—5ml/h (1ml/h step)
- Power Consumption : 18VA



## BI-PAP - 30T Presssure

BMC GII Y30T

### Specifications

- Pressure support automatically adjusts according to target tidal volume as to improve Hypoventilation Real time Monitoring includes Pressure flow, Expiratory tidal volume (ETV), respiratory rate (RR) minute ventilation (MV), leakage Inspiration time (Ti) SpO2\* and Pulse rate (PR)\*.
- BMC + iCode App
- SpO2 Kit (Optional)
- GPRS / Wi-Fi Kit (Optional, individually or Combined with SpO2 Kit)
- Advanced leakage compensation promises adequate volume support. Ti Control, I/E Sense and Rise time guarantee better ventilation sync hornization.



## Auto C-PAP

BMC GII

### Specifications

- RESmart GII Auto CPAP System
- RESmart GII Auto CPAP System E - 20A- H-O assembled with LCD screen and 3- Button control simplifies your life.

### Easy Data Access

- iCode and SD card are two easy way to transfer your Compliance records.

### Smart Pressure Match

- Pressure are automatically adjusted to Prevent sleep apnea, Reslex respiratory pressure.

### Technical Specifications

- Dimension : 220x194x112mm / 313x194x112mm
- Maximum Flow : >35LPM
- Pressure Display Accy.: > 0.5hPa
- IPXI - Drip-Proof, Vertical



## Fetal Monitor (8" Screen)

CMS-800G1

### Specifications

- Light dexterous appearance, tops horizontally and walls Can be hoisted
- 8.0" Screen color LCD display, rotatable screen to 60
- Display of the patient data and curve clearly
- FHR 120 BPM - 160 BPM Normal range label Manual records fetal movement.
- Sound and color alarm for high and low fetal heart rate.
- Continuous 24-hours real time monitoring function
- Continuous 12-hours patient curve and data storage, playback and print with Picture freeze function,
- Optional English Interface.



CE

## Oxygen Concentrator 5 Litre Single Flow

OC-101

### Specifications

|                       | Standard Features  |
|-----------------------|--|
| Flow Rate             | 0-5L/min   |
| Purity                | 93+3%  |
| Outlet Pressure (Mpa) | 0.04-0.07  |
| Sound Level           | ≤50db  |
| Power                 | AC230V, 50Hz (AC220V/110+10%, 50/60+1Hz are available)   |
| Power Consumption     | ≤480W  |
| LCD Display           | Switch times, Operating pressure, Present working time, Accumulating time, Presetting time from 10mms to 40hours |
| Alarm                 | Power failure Alarm, High & Low pressure alarm   |
| Net Weight            | 25Kgs  |
| Size(mm)              | 365 x 375 x 600  |



CE

## Head Lamp

BT-410

|                            | Standard Features |                    |
|----------------------------|-------------------|--------------------|
| Illumination               | Standard          | 15,000 -30,000 lx  |
|                            | Astral Lamp       |                    |
| Adjustable Illumination    |                   | 0                  |
| Illumination Uniformity    |                   | High               |
| Adjustable Light Spot      |                   | X                  |
| Light Spot Size (at 300mm) |                   | 70mm               |
| Astral Lamp*               |                   | X                  |
| Color Temperature          |                   | 6,000 K            |
| LED Life Time              |                   | Approx 50,000 hour |
| Loupe                      | Type              | Single Lens        |
|                            | Magnification     | 2x                 |
| Battery                    | Type              | Lithium-ion        |
|                            | Magnification     | 3.7V / 2,200 mAh   |
|                            | Run Time          | 4 hour             |
|                            | Charging Time     | 4 hour             |
| Weight                     |                   | 190g               |
| Band Size                  |                   | 540 - 640mm        |



CE

## AED (Automatic Extrenal Defibrillator)

AED-7000

### Specifications

AED 7000 (Automatic External Defibrillator) is a defibrillator device, which is safe, portable and easy to use. It can be applied in family and public to give first aid to the sudden death symptom. Combined with advanced ECG analytical technique from M&B company, the defibrillator can analyze the patient ECG, make a judgement for the patients cardiac condition and indicate whether the defibrillation is needed and the defibrillation strength. It can not only enhances the success rate of defibrillation, at also reduce the injury of defibrillation to heart the utmost extent. There is Low Requirement for the operation to use the device. The defibrillator will guide the operator to carry out defibrillation treatment via voice prompt step by step give safety alert if the occasion arises. It can carry early defibrillation treatment effectively and protect the operator farthest, being very applicable to the emergency treatment for the sudden cardiac death patient in family and public place.



The AED 7000 Automatic External Defibrillator delivers the defibrillation shock through two self-adhesive, Pre-gelled, low-impedance electrode, defibrillator pads.

CE

SU - 103

Trolley Model Suction



Technical Specifications

|                              |                       |
|------------------------------|-----------------------|
| Voltage                      | AC 220 V/50Hz         |
| Max. Negative Pressure Value | ≥ 0.09 MPa / 680 mmHg |
| Pumping Rate                 | ≥ 20L/min             |
| Reservoir Volume             | ≥ 2500ml x 2 jars     |
| Input Power                  | 150 VA + 15%          |
| Noise                        | ≤ 60dB(A)             |

CE

SP - 07

Three Ball Spirometer

Features

- Made of safe and comfortable PE material, combined with ergonomic design.
- Pipeline bending resistance, not effected by the patient's posture, easy to clean, durable.
- The bottom filter screen can effectively prevent cross-infection and keep the sphere clean and hygienic.



CE

OC 101 Oxygen Concentrator 5 Ltr. with Nebulizer



SINGLE FLOW

CE



DUAL FLOW

CE

Specifications

|                       |  |
|-----------------------|--|
| Model                 | OC-101   |
| Flow Rate             | 0-5L/min   |
| Purity                | 93+3%  |
| Outlet Pressure (Mpa) | 0.04-0.07  |
| Sound Level           | ≤ 50db   |
| Power                 | AC230V, 50Hz (AC220V/110+10%, 50/60+1Hz are available)   |
| Power Consumption     | ≤480W  |
| LCD display           | Switch times, Operating pressure, Present Working Time, Accumulating Time, Presetting Time from 10mins to 40 hours |
| Alarm                 | Power failure alarm, High&Low pressure alarm   |
| Net Weight            | 25Kgs  |
| Size (mm)             | 365x375x600  |

SP 01

Syringe Pump



Features

- Freely Stackable: Users can freely stack one syringe pump onto another to provide multiple Solutions, which have a wide range of clinical applications.
- Transfer the message between the Nurse-call System and the pumps.
- Three working modes: rate mode, time-volume mode, dosage-weight mode.
- Unique Human Voice Alarm system and accurate injection rate make the injection process safer and more reliable.
- Have store many brands syringes, Automatically calibration and compatible with any brand of syringes.
- Large LCD screen displays working status.
- KVO and Bolus functions.

CE



SP 04

Syringe Pump



Specifications

|                     |   |
|---------------------|---|
| Display             | 2.8 Inches  |
| Dimension           | 300mm x 106mm x 146mm (W x D x H)                   |
| Weight              | 1.5 Kg  |
| Power Supply        | 100V - 240V, 50/60Hz                                |
| Power Consumption   | <55VA   |
| Syringe Requirement | Refer To " Section 11 Notes On Disposable Syringes" |
| Maximum Flow Rate   | 2100 (m/h)  |

CE



MS 51EC Syringe Pump

**BT 400**

**Phototherapy**



**Technical Specifications**

**Light Source - Blue LEDs**

Wavelength ..... Peak between 450 ~ 475nm  
 Intensity ..... 20 ~ 100 nW / cm<sup>2</sup>/nm at 40cm  
 Variation in intensity over 6 hours .....+ 10% (with in illumination area)  
 Effective surface area ..... 40 x 20 cm

**Function**

Intensity Control ..... Low intensity : 20 ~ 70 uW/cm<sup>2</sup>/nm + 10%  
 High intensity : 40 ~ 100uW /cm<sup>2</sup>/nm + 10%  
 30 min ~ 999 hours 30 min.

**Features**

- 20,000 hour operating time
- High intensity with efficient treatment
- Operating & total using time display
- Timer, 2 Level adjustable intensity
- Light weight and compact size



**BT 410**

**Head Lamp**



Scan QR for Video

**Specifications**

|                            |               |                    |
|----------------------------|---------------|--------------------|
| Illumination               | Standard      | 15,000 - 30,000 lx |
|                            | Astral Lamp   |                    |
| Adjustable Illumination    |               | O                  |
| Illumination Uniformity    |               | High               |
| Adjustable Light Spot      |               | X                  |
| Light Spot Size (at 300mm) |               | 70mm               |
| Astral Lamp*               |               | X                  |
| Color Temperature          |               | 6,000 K            |
| LED Life Time              |               | Approx 50,000 hour |
| Loupe*                     | Type          | Single Lens        |
|                            | Magnification | 2 x                |
| Battery                    | Type          | Lithium-ion        |
|                            | Capacity      | 3.7V / 2,200 mAh   |
|                            | Run Time      | 4 hour             |
|                            | Charging Time | 4 hour             |
| Weight                     |               | 190g               |
| Brand Size                 |               | 540 - 640mm        |
| Warranty                   |               | 1 year             |

**Features**

- Illumination Uniformity**  
Multi-Lens Structure ensure high level of uniform luminance in its light spot
- Coaxial Design**  
Light source is located between two eyes is able to cast least shadow on the surface, also the luminance angle moves freely with pivot joint structure
- Interchangeable Battery**  
Rechargeable Battery is interchangeable with additional battery, no need to worry anyone about remaining power.



- Adjustable Light Spot**  
Light Spot is adjustable from 30mm to 70mm at distance 300mm.



- Astral Lamp**  
Additional astral lamp increase move illumination and decrease the shadow on the surface.



ET 01

Etco<sub>2</sub> Module



Specification

The Low Flow Sidestream ETCO<sub>2</sub> (End-tidal CO<sub>2</sub>) Module CO<sub>2</sub> Sensor is the ideal low sampling- rate capnography solution for your patient monitoring system. The sidestream ETCO<sub>2</sub> Module (End-tidal CO<sub>2</sub>) Model ET01 features cutting-edge technology for measurement of End-Tidal Carbon Dioxide (ETCO<sub>2</sub>) and respiratory rate. It delivers a clear, accurate capnogram at all respiratory rates up to 150 breaths per minute. With a sampling rate of 50 mL/min, it is ideal for use on adult, pediatric and infant patients; patients undergoing procedural sedation; and short- term monitoring of intubated patients.



IBP 01

IBP Module



Specification

The product is a high accuracy blood pressure measure equipment which is used with corresponding monitor. It can measure the blood pressure of the chosen vas (SYS / MAP / DIA) .It is fit for the blood pressure monitor of adult, enfant and infant.

Features

- Plug and play IBP technique
- It is fit for adult, enfant and infant.
- Low-power consumption, dispense with special power supply
- Automatic digital data processing

IBP Cable  
IBP Sensor  
IBP Module



ABPM 50

Ambulatory Blood Pressure Monitor



Features

- Compact and portable, user-friendly interface, easy to use
- Patient range: adult, pediatric, neonate
- 24 hours ambulatory NIBP monitoring function, up to 350 groups of ambulatory NIBP data can be recorded for once.
- Perfect combination of automatic and manual measurement method, up to 300 groups of data can be recorded for once by manual measure.
- High-definition color TFT display, strong visibility
- By data review interface such as "data list", "trend graph", "big font", NIBP data is clear at a glance
- Display of low power prompt, alarm, error message and time
- Supply two kinds of unit: mmHg / kPa
- Display interface can be switched between Chinese and English
- Parameter alarm dispose function is optional
- Communicate with PC, PC software can achieve data review, measured results analysis, view of trend graph, reports printing and other functions



## AS - 03

## Air Splint



- This Multifunctional nursing splint can be used for both the left and right limbs at same time. The kit including: adult arm splint, adult leg splint, shoulder joint splint, child arm splint, straps and a carrying bag. It is made of leather.
- The splints are suitable for X-ray and MRI.

CE

## HM - 01

## Head Immobilizer



**Detailed Product Description:** Made of high-density plastic materials, large ear holes for monitoring the patient's ear canal. It can be used with scoop stretcher and spine board at the same time. Minimal interference with X-ray, MRI, or CT scanning procedures. Water-resistant plastic coating make it easy to clean and prevents bacterial growth on it.

CE FDA

Brace 12

Emergency Ventilator



Extraordinary performance point:

- 12 Inch large screen with desirable color schemes
- Easy to operate
- Support adult and pediatric ventilation mode
- Multi-mode ventilation function (VCV, SIMV, PSV, PCV, CPAP, Manual SIGH)
- Intelligence operating system
- Air Compressor Support (optional)
- Self-testing and calibration.

Technical Specifications


| Physical specifications |                               |
|-------------------------|-------------------------------|
| Dimensions:             | 45*55*140cm                   |
| Weight:                 | 65kg                          |
| Casters:                | Central brake with lock       |
| Screen:                 | 12 inch                       |
| Display                 | Colour LCD                    |
| Display graphics        | Waveforms of P-T, F-T, V-T    |
| Loops                   | P-V, F-V(optional)            |
| Screen control          | NEC no dead spot at any angle |

| Environmental Conditions |                  |
|--------------------------|------------------|
| Operating Temp           | 5 C ~ 40 C       |
| Storage Temp             | -10 C ~+40 C     |
| Humidity                 | ≤80 %            |
| Atmosphere Pressure      | 960hPa ~ 1040hPa |



**Easy and intuitive operation**


- 10.4" color touch screen
- Simple, intuitive & user-friendly interface, facilitating all readability of patient information in any conditions

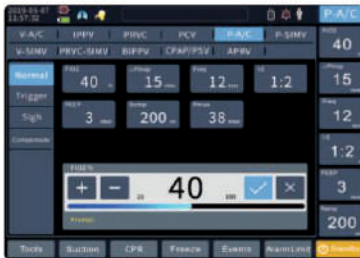

- Proven performance in both invasive and noninvasive ventilation
- High flow oxygen therapy (Flow rates up to 65L/min)



- Amoul CPR mode with interactive visual & audio guide

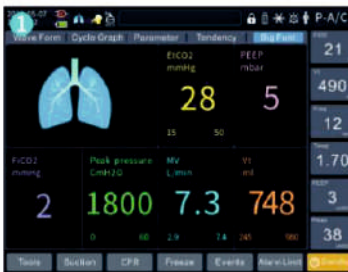

- ① Dynamic lung
- ② Recruitment manoeuvre
- ③ Battery operating time up to 4 hours. AC and DC power connections are available
- ④ Removable expiratory and inspiratory valves support autoclave steam sterilization



| Control Parameters     |  |
|------------------------|--|
| Respiratory frequency  | 0 ~ 150 bpm  |
| Inspiratory time       | 0.2 ~ 10 s   |
| Inspiratory pause      | 0% ~ 60%   |
| Tidal volume           | 2 ~ 2000 ml  |
| Oxygen concentration   | 21% ~ 100%   |
| Inspiratory pressure   | 1 ~ 90 cmH2O   |
| Pressure trigger       | -20 ~ -0.5 cmH2O   |
| PEEP                   | 0 ~ 40 cmH2O   |
| Pressure support       | 1 ~ 90 cmH2O   |
| Flow trigger           | 0.2 ~ 20 L/min   |
| Monitoring Parameters  |  |
| ETCO2                  | 0 ~ 150 mmHg   |
| Waveforms              | Pressure, flow, volume, ETCO2  |
| Loops                  | P-V, F-V, P-F, ETCO2-V   |
| Configurations         |  |
| Three delivery options | Neonate version: 2 ~ 300 ml<br>Adult version: 20 ~ 2000 ml<br>Full function version: 2 ~ 2000 ml |

**ETCO2 monitoring**

Optional mainstream ETCO2 module for real-time CO2 measurement

**Special functions**

Inspiratory hold, expiratory hold, sigh, medication nebulization, suction maneuver, compliance compensation, auto tube resistance compensation, automatic barometric pressure compensation, HFNC, CPR, manual breath, loops, trends, waveform and loop freezing, PEEPI, P0.1, lung recruitment, P-V tool, and dynamic lung

**Intelligently designed all-in-one trolley to transport T6 life support ventilator in the hospital**

Capacity to hold compatible accessories; Convenient & ease of use in various hospital environments.





SP 100

Spirometer With Printer



Descriptions

SP100 Spirometer is a portable lung function testing device, which mainly used to examine lung function related parameters for patients. It can be applied to various environments such as in hospitals, clinics, etc. And it is also suitable for communities, schools, factories and other places to conduct epidemiological investigation, health examination, occupational disease screenings.

SP 10

Spirometer

Features

- High-resolution color LCD.
- FVC, FEV1, PEF, FEV 1%, FEF25, FEF75, FEF2575 can be measured.
- Display of waveform and trend chart.
- Display of testee's health condition.
- Measurement data can be stored, deleted, uploaded and reviewed.
- Scaling (Calibration)
- Clock Function.
- Auto Power-off.
- Rechargeable lithium battery, with power indication.
- Dimension: 97mm(L) x 89mm(W) x 36mm(H)



SP 10

Spirometer

Specification

SPIROMETER is a hand-held equipment for checking lung conditions, adopts the infrared mode for measuring relative items, it is applicable for hospital, clinic, family for routine test.

Features

- Flow rate-volume chart, volume-time chart display.
- Data memory, delete, upload and review.
- Trend chart display.
- Calibration.
- Information prompts when volume or flow goes beyond the limits.
- Automatic power off when there is no operation in two minutes.
- Rechargeable lithium battery and with charging tips.
- Battery power display.



SP - 07

Three Ball Spirometer

Features

- Made of safe and comfortable PE material, combined with ergonomic design.
- Pipeline bending resistance, not effected by the patient's posture, easy to clean, durable.
- The bottom filter screen can effectively prevent cross-infection and keep the sphere clean and hygienic.



VL

Video Laryngoscope



Blade Parameter Size

| Blade                     | MAC2   | MAC3        | MAC4         |
|---------------------------|--|-------------|--------------|
| Application               | Small Adult  | Adult       | Large Adult  |
| Intubation Inner Diameter | 5.0 - 6.0mm  | 6.0 - 9.0mm | 7.0 - 10.0mm |
| Length                    | 12.11  | 14.25       | 16.08        |
| Sterilize                 | 2.0% Glutaral fully soak for 10 minutes<br>OR 0.5% cidex OPA for more than 5 minutes |             |              |

Technical Specification

| Parts                 | Description                           | Technical Index                                       |
|-----------------------|---------------------------------------|---|
| Machine               | Display                               | 3inch LCD   |
|                       | Resolution                            | 640*480 (RGB)   |
|                       | Viewing angle                         | ≥60°  |
|                       | Power                                 | <2W   |
|                       | Display front and back rotation Angle | 0 °~130 °   |
|                       | Weight                                | 225g  |
| Camera                | Illuminance                           | ≥150 LUX  |
|                       | Resolution                            | 1280*720 px   |
| Image/ Video function | Image/ Video function                 | Yes   |
|                       | Output                                | USB output, Easy to storage and establish image/video |
|                       | Memory type                           | Micro SD card 8GB                                     |
| Batterty              | Battery Type                          | Rechargeable lithium battery                          |
|                       | Capacity                              | 1350mAh   |
|                       | Cycle life of battery                 | >500 times  |
|                       | Battery working time                  | >240min   |
|                       | Charging time                         | <2(hrs)   |

**Accessories**



**SpO2 Extension Cables**



**SpO2 Probes**



**Limb Electrodes**



**NIBP Cuff  
(Adult, Child & Neonatal)**



**IBP Cables**



**Chest Electrodes**



**Temperature Probe**



**NIBP Cables**



**Digital BP Cuff  
(Adult, Child & Neonatal)**



**Tourniquet**



**Bandage Cutting Scissor**



**ESU Pencil**



**E.C.G Cables and Leadwires**



**Pen Torch**



**Lancing Device  
(LD-01)**



**Blood Lancets**

**ICU Bed Five Functional Electric**



- Frame made of strong rectangular CRCA pipe
- Uniformly perforated Four Sectional CRCA Sheet top
- Back-rest, knee-rest, trendelenburg/Reverse trendelenburg hi-low position obtained by electric actuator
- SS molded head and foot panels
- Aluminium collapsible side safety railing
- Bed mounted on 5 inch special casters, two with brakes
- One S.S.I.V rod
- Overall size: 220 L \* 100 W \* 60-80 H cm
- Pre-treated and Epoxy powder coated

**ICU Bed Five Functional Electric (Eco Model)**

- Frame made of strong rectangular CRCA pipe
- Uniformly perforated Four Sectional CRCA Sheet top
- Back-rest, knee-rest, trendelenburg/Reverse trendelenburg hi-low position obtained by electric actuator
- ABS molded head and foot panels
- Aluminium collapsible side safety railing
- Bed mounted on 5 inch special casters, two with brakes
- One S.S.I.V rod
- Overall size: 220 L \* 100 W \* 60-80 H cm
- Pre-treated and Epoxy powder coated



**ICU Bed Five Functional Manual**



- Frame made of strong rectangular CRCA pipe
- Uniformly perforated Four Sectional CRCA Sheet top
- Back-rest, knee-rest, trendelenburg/Reverse trendelenburg hi-low position obtained by crank mechanism
- ABS molded head and foot panels
- ABS side safety railing
- Bed mounted on 5 inch special casters, two with brakes
- One S.S.I.V rod
- Overall size: 220 L \* 100 W \* 60-80 H cm
- Pretreated and Epoxy powder coated



**ICU Bed Five Functional Manual (Eco Model)**



- Frame made of strong rectangular CRCA pipe
- Uniformly perforated Four Sectional CRCA Sheet top
- Back-rest, knee-rest, trendelenburg/Reverse trendelenburg hi-low position obtained by crank mechanism
- ABS molded head and foot panels
- Aluminium collapsible side safety railing
- Bed mounted on 5 inch special casters, two with brakes
- One S.S.I.V rod
- Overall size: 220 L \* 100 W \* 60-80 H cm
- Pretreated and Epoxy powder coated



- Frame made of strong rectangular CRCA pipe
- Uniformly perforated Four Sectional CRCA Sheet top
- Back-rest, knee-rest operated by Motor & Remote
- ABS molded head and foot panels
- Aluminium collapsible side safety railing
- Overall size: 220 L \* 100 W \* 60-80 H cm
- Pretreated and Epoxy powder coated
- Bed mounted on 5 inch special casters, two with brakes

**Fowler Bed Electrical**



**Fowler Bed Super Deluxe**



- Frame made of strong rectangular CRCA pipe
- Uniformly perforated Four Sectional CRCA Sheet top
- Back-rest, knee-rest obtained by crank mechanism
- ABS molded head and foot panels
- Overall size: 220 L \* 100 W \* 60-80 H cm
- Pretreated and Epoxy powder coated
- Bed mounted on 5 inch special casters, two with brakes



**Fowler Bed Deluxe A**



- Frame made of strong rectangular CRCA pipe
- Uniformly perforated Four Sectional CRCA Sheet top
- Back-rest, knee-rest obtained by crank mechanism
- Full SS molded head and foot panels
- Overall size: 220 L \* 100 W \* 60-80 H cm
- Pretreated and Epoxy powder coated

- Frame made of strong rectangular CRCA pipe
- Uniformly perforated Four Sectional CRCA Sheet top
- Back-rest, knee-rest obtained by crank mechanism
- SS cum sunmica molded head and foot panels
- Overall size: 220 L \* 100 W \* 60-80 H cm
- Pretreated and Epoxy powder coated

**Fowler Bed Eco**



**Fowler Bed Deluxe**



- Frame made of strong rectangular CRCA pipe
- Uniformly perforated Four Sectional CRCA Sheet top
- Back-rest, knee-rest obtained by crank mechanism
- Powder Coated molded head and foot panels
- Overall size: 220 L \* 100 W \* 60-80 H cm
- Pretreated and Epoxy powder coated



**Semi Fowler Bed Electric**



- Frame made of strong rectangular CRCA pipe
- Uniformly perforated Four Sectional CRCA Sheet top
- Back-rest obtained by Motor & Remote
- ABS molded head and foot panels
- Overall size: 220 L \* 100 W \* 60-80 H cm
- Pretreated and Epoxy powder coated

**Semi Fowler Bed Super Deluxe**



- Frame made of strong rectangular CRCA pipe
- Uniformly perforated Four Sectional CRCA Sheet top
- Back-rest obtained by crank mechanism
- ABS molded head and foot panels
- Overall size: 220 L \* 100 W \* 60-80 H cm
- Pretreated and Epoxy powder coated

**Semi Fowler Bed Deluxe**



- Frame made of strong rectangular CRCA pipe
- Uniformly perforated Four Sectional CRCA Sheet top
- Back-rest obtained by crank mechanism
- SS cum Sunmica molded head and foot panels
- Overall size: 220 L \* 100 W \* 60-80 H cm
- Pretreated and Epoxy powder coated



**Semi Fowler Bed Eco Model**



- Frame made of strong rectangular CRCA pipe
- Uniformly perforated Four Sectional CRCA Sheet top
- Back-rest obtained by crank mechanism
- Powder Coated molded head and foot panels
- Overall size: 220 L \* 100 W \* 60-80 H cm
- Pretreated and Epoxy powder coated

**Plain Bed Super Deluxe**



- Frame made of strong rectangular CRCA pipe
- ABS molded head and foot panels
- Overall size: 220 L \* 100 W \* 60-80 H cm
- Pretreated and Epoxy powder coated

**Plain Bed Deluxe**



- Frame made of strong rectangular CRCA pipe
- SS molded head and foot panels
- Overall size: 220 L \* 100 W \* 60-80 H cm
- Pretreated and Epoxy powder coated





**Plain Bed Eco Model**



- Frame made of strong rectangular CRCA pipe
- Powder Coated molded head and foot panels
- Overall size: 220 L \* 100 W \* 60-80 H cm
- Pretreated and Epoxy powder coated

- Main frame of rectangular pipe
- Perforated CRCA sheet top.
- Tubular head & foot bows of equal height with vertical tube supports on PVC stumps.
- Drop down type safety side railings are provided.
- Size: 137L x 76W x 60H cms.
- Finish Pre-treated & Epoxy Powder Coating finish.

**Pediatric Bed**



- Measurement: 870x530x780~980mm
- Aluminum colum, height is adjustable
- Weighing system is optiona

**Baby Bassinet**



### O.T Table Electric



- SS five sectional top with large cut for perianal drainage tray, built Kidney Bridge Both side Controls
- Electrically Operated
- Heavy duty steel base with nylon wheels for easy mobility or stability with single action foot actuated floor locking
- Smooth gear mechanism to avail all operating positions
- 50, Thick electrically sealed mattress
- Provide with all sporting accessories
- Durable heavy duty leak proof Motors & Remote Provided with standard accessories

### OT Table Hydraulic




- SS five sectional top with large cut for perianal drainage tray, built Kidney Bridge
- Both side Controls
- Hydraulic Operation tables
- Heavy duty steel base with nylon wheels for easy mobility or stability with single action foot actuated floor locking
- Smooth gear mechanism to avail all operating positions
- 50, Thick electrically sealed mattress
- Provide with all sporting accessories
- Durable heavy duty leak proof hydraulic pump with double cylinder concealed in central chamber
- Provided with standard accessories

### O.T Table C-Arm Electric



- Five Sectional Stainless Steel Radio Translucent Top.
- Eccentrically Positioned top for maximum access for movement of c-arm image intensifier.
- Base and cover made of heavy & hygienic stainless steel sheet.
- Mobile on Smooth running castors and floor locking system for stability.
- Remote Control system Offers Define Position:
  - Up and Down Position
  - Chair position for Seating operation

### O.T Table C-Arm Hydraulic

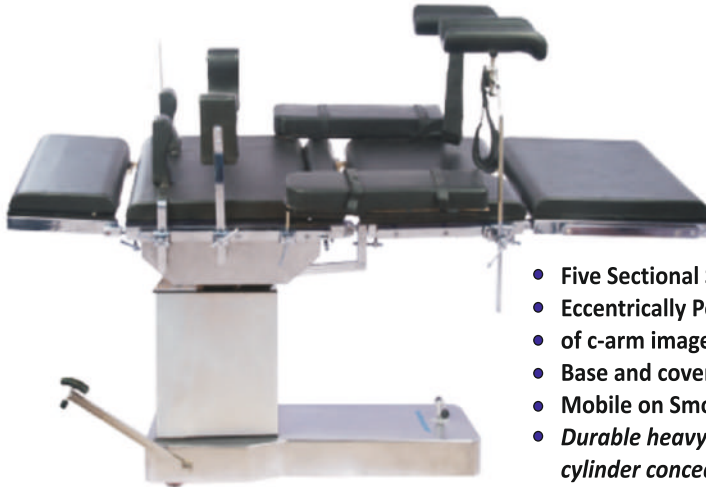

- Five Sectional Stainless Steel Radio Translucent Top.
- Eccentrically Positioned top for maximum access for movement of c-arm image intensifier.
- Base and cover made of heavy & hygienic stainless steel sheet.
- Mobile on Smooth running castors and floor locking system for stability.
- Durable heavy duty leak proof hydraulic pump with double cylinder concealed in central chamber

### Delivery Table



- Overall approx. size: 187 L \* 51 W \* 81 H
- Adjustable backrest by gas spring system
- Two section foam padded, upholstered top
- Three drawers
- Three cabinets
- Tray for BP apparatus
- Pretreated and Epoxy powder coated
- Adjustable lithotomy poles with straps
- Also available in SS

### Delivery Table Three Fold



- Made In Three Sections, Adjustable back rest & Leg Section With lever mechanism to various Positions capable of tilting for obstetric and gynecological Use
- Epoxy Coated Tubular Steel frame
- Highly Coated mattress pad
- Supplied with two leg holders with canvas strap


### Delivery Bed



- Tubular Frame work mounted on 125mm dia castor two with brakes
- Three Section top made of MS Pipe with fix cushion mattress
- Height adjustment & back section adjustment through electric actuator system
- Leg end section can slide under the main section
- SS telescopic IV Rod

### Delivery Table Hydraulic Deluxe

- Three Sectional Stainless Steel Top, Back-rest adjustable by Ratchet
- Middle Section with "U" cut, leg section can slide under main frame
- Trendelenburg Position achieved with Pneumatic pump system
- Provide with head & side safety rails, SS Hand Grips
- Three sectional Matters, a pair of Lithotomy crutches & one IV Rod
- Sliding SS Douche Tray
- Legs Fitted on four rubber stumps
- Overall Extendable Size: 187 L x 96 W x 80 H C

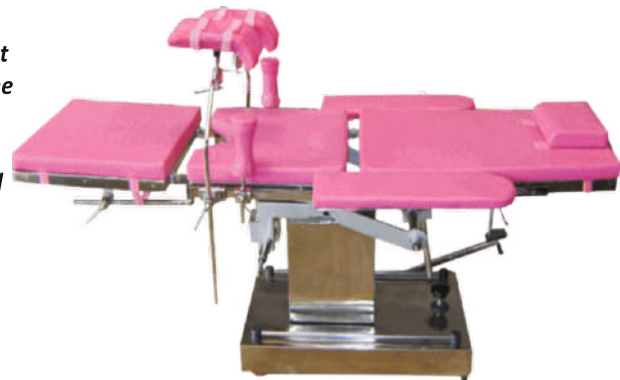

### Delivery Table Electric



- The Table is design for women's obstetric & Gynecological Operation
- Operation Position - up / Down, adjustable back rest and reverse Position
- Main frame work Epoxy Powder coated Steel
- Supplied with two leg holders with canvas strap
- Adjustable legs support & Sliding Grip Holder
- Equipped with 8cm Thick High Quality Mattress

### Mobile O.T Light

- Have daylight characters
- can be adjustable as per the operation requirements
- lights arms are made of stainless steel fitting
- Range of the color temp  $4200\text{ K} \pm 300$  as natural color tone
- Detachable handle for simplistic sterilization
- Diachronic reflectors & color correcting filters
- Metallic reflectors available



### O.T Light Single Dome Halogen



- lux intensity 90,000*
- halogen bulb of 24v 150w
  - 20" dome diameter
  - Arms And all Accessories are made up of SS

### O.T Twin Light Halogen

- lux intensity 1,80,000
- halogen bulb of 24v 150w
- 20" dome diameter each
- Arms And all Accessories are made up of SS
- Also available in diachloride & Aluminum Domes



**LED O.T Light Single Dome**



- intensity:120000 lux:10%
- size of led field:12-30 cm
- Number of Led:19x4 (multiple colour)
- With Brightness Controler (Feather Touch)
- Adjustable Focus

**LED O.T Light Single Dome**

- intensity:135000 +- 10%
- Number of LEDs :-51
- Size of led field : 18-35cm
- Adjustable Focus
- With anti hms system
- With feather touch controller



**LED O.T Light Twin Light**



- intensity:2,20,000 lux
- size of led field:12-30 cm
- Number of Led:19x8 (multiple colour)
- With Brightness Controler (Feather Touch)
- Adjustable Focus

*Stretcher Trolley*



*Stretcher Trolley Deluxe*



*Stretcher Trolley Cum Chair*



*Emergency Patient Trolley*



*Ambulance Stretcher*



*Scrub Station With Sensor / Without Sensor*



*Attendant Bed Cum Chair*



*Examination Table Plain*



*Blood Donating Chair*



*Hospital Three Fold Screen*



*Crash Cart With ABS Drawers*



*Crash Cart With S.S Drawers*





*Three Seater Chrome*



*Three Seater*



*Examination Couch Deluxe*



*Cylinder Trolley*



*Revolving Stool Super Deluxe*



*Revolving Stool Deluxe*



*Bed Side Locker S.S*



*Bed Side Locker Semi Deluxe*



*Bed Side Locker Deluxe*



*Bed Side Locker ABS Type*



*ABS Anesthetic Cart*



*Wheel Chair*



*Instrument Trolley All SS*



*Instrument Trolley Box Type*



*Instrument Trolley Powder Coated*



*Instrument Trolley Three Shelf*



*Dressing Trolley All S.S*



*E.C.G Trolley*



*Linen Trolley*



*Laparoscopy Trolley*



*Food Table*



*Bio-Waste Trolley*



*Mayo's Trolley*



*Instrument Cabinet*



*Spine Board*



*Scoop Stretcher*



*Tow Fold Strecher*



*Four Fold Stretcher*




*I.V Stand*



*Kick Bucket*



*Oxygen Pipeline*

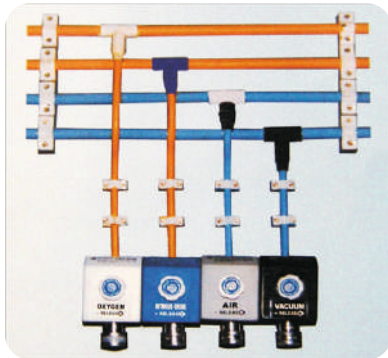

*Fogger Machine*




*Three Para Monitor*



*Five Para Monitor*



*E.C.G Machine*

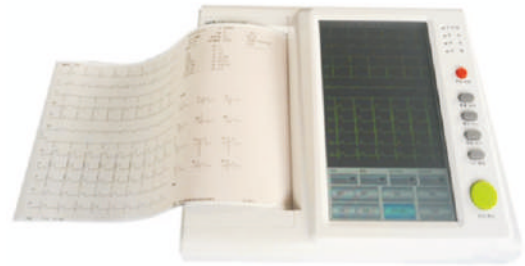

*New & Pre-Owned Defibrillator*



*Cautery Machine (300w / 400w / Sealer)*



*Syringe Pump*



*Fetal Monitors & C.T.G Machines*



*Bi-pap & C-pap Machines*



*Oxygen Concentrators*



*New & Pre-Owned  
C.T Scan Machines*



*New & Pre-Owned  
M.R.I Scan Machines*



*New & Pre-Owned  
C.T Scan Machines*



*New & Pre-Owned  
C.R Systems*



*New & Pre-Owned  
C-arm Machines*



*New & Pre-Owned  
Diagnostic Ultrasound Scanners*



*T.C & General Instruments*



*Laparoscopy & Endoscopy Equipments & Instruments*



*New & Pre-Owned Endoscopy & Laparoscopy Camera Units*



*New & Pre-Owned Gastroscopy Units*



*New & Pre-Owned Bubble C-pap*



*Dental Chair*





*Microscopes, Centrifuge, Incubator, Hot Air Oven & All Scientific Goods*



*Hematology Analyzer*



*Electrolyte Analyzer*



*Arterial Blood Gas Machine*



*Biochemistry Analyzer*



*Elisa Reader & Washer*



*Baby Radiant Warmer*



*LED Photo Therapy Machine  
Single Surface / Double Surface*



*Baby Incubator*



*Horizontal & Vertical Autoclave*



*E.T.O Sterilizer*



*Suction Machines*



*Anesthesia Workstation & Trolleys*



*Ventilator Machine*



*Automatic External Defibrillator*



*Bed Headed Panels*



*O.T Pendant*



*I.C.U & Wards Curtaining*



*E.N.T & Neuro Microscopes*



*Physiotherapy Goods*



*General Surgical Goods*



*Mannequins & All Dummies*



*Dressing Drum, Kidney T ray & Instrument T ray*



**VRJ**  
HEALTHCARE  
PRIVATE LIMITED



**Regd. Office:-** S-279-B, First Floor, School Block,  
Shakarpur, Delhi-110092 INDIA

**Corporate Office:-** Suite No. 017-0094  
Near Railway Line, Agarwa

Hospital Road, Motihari- 845401 (BIHAR)



[md@vrjhealthcare.com](mailto:md@vrjhealthcare.com)